



Zwilling (nach DIN EN 12737) Schlitzbreite 3,5 cm

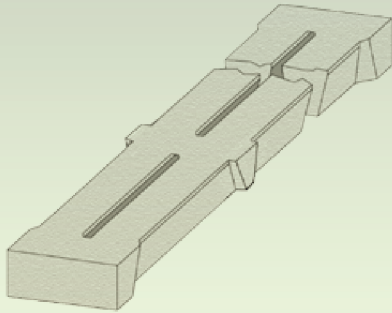



**Betongüte
C50/60**



Längen (cm)	Breite (cm)	Höhe (cm)	Gewicht pro Elem. (kg)	Gewicht (kg/m ²)
180	36	15	165	255
190	36	15	175	255
200	36	15	184	255
210	36	15	193	255
220	36	15	202	255
230	36	15	211	255
240	36	15	220	255
250	36	15	229	255
260	36	15	238	255
270	36	15	248	255
280	36	15	257	255
290	36	15	266	255
300	36	15	275	255
310	36	16	301	270
320	36	16	311	270
330	36	16	320	270
340	36	16	330	270
345	36	16	340	270
350	36	17	403	320
360	36	17	415	320
370	36	17	426	320

Auflager mindestens 12 cm, Schlitzbreite: 3,5 cm

Zwilling (nach DIN EN 12737) Schlitzbreite 3,0 cm

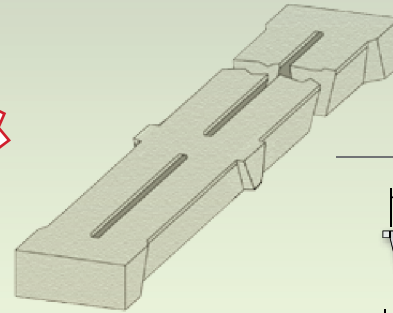

Längen (cm)	Breite (cm)	Höhe (cm)	Gewicht pro Elem. (kg)	Gewicht (kg/m ²)	
100	30	15	77	255	E
110	30	15	84	255	E
120	30	15	92	255	E
130	30	15	99	255	E
140	30	15	107	255	E
150	30	15	115	255	E
160	30	15	122	255	E
170	30	15	130	255	E
180	30	15	138	255	E
190	30	15	145	255	E
200	30	15	153	255	B
210	30	15	161	255	B
220	30	15	168	255	B
230	30	15	176	255	B
240	30	15	184	255	B
250	30	15	191	255	B
260	30	15	199	255	B
270	30	15	207	255	B
280	30	15	214	255	B
290	30	15	222	255	B
300	30	15	230	255	B
310	30	16	251	270	E
320	30	16	259	270	E
330	30	16	267	270	E
340	30	16	275	270	E
345	30	16	279	270	E
350	30	17	320	305	B
360	30	17	329	305	B
370	30	17	339	305	B

B = Beidseitiger Kopf, E = Einseitiger Kopf

Auflager mindestens 12 cm, Schlitzbreite: 3,0 cm

**Wichtiger
Hinweis!**

Lieferung durch Kranwagen.
Die durch Kranentladung notwendigen Kanthöl-
zer müssen - vor Ort - bauseitig gestellt werden.